



Blackberry 7520 LCD Screen Replacement

Written By: Nathan



INTRODUCTION

If you are removing or replacing the Blackberry 7520 LCD screen, look here for support.



TOOLS:

- [T6 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Turn the phone upside down.
- Push down on the black button on the back of the phone to slide the rear panel off.
- The battery should be visible now.

Step 2



- Hold the BlackBerry in one hand face-up with the screen facing towards you.
- ⓘ **Gently** smack the phone against your hand to dislodge the battery.

Step 3 — Logic Board



- Use a T6 Torx screwdriver to remove the 6 screws holding the rear of the phone.

Step 4



- Use a pick or small tool to push the clips holding the rear **away** from you.

⚠ Applying too much pressure could break the plastic clips and permanently damage your BlackBerry.

Step 5





- Repeat the process of unlatching the clips for the top section of the BlackBerry.

Step 6



- Slide the rear panel forwards in order to reveal the logic board

Step 7

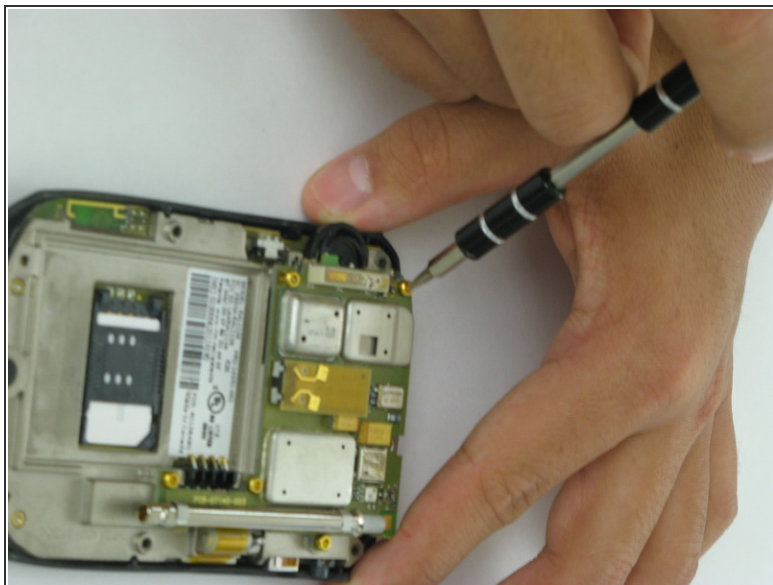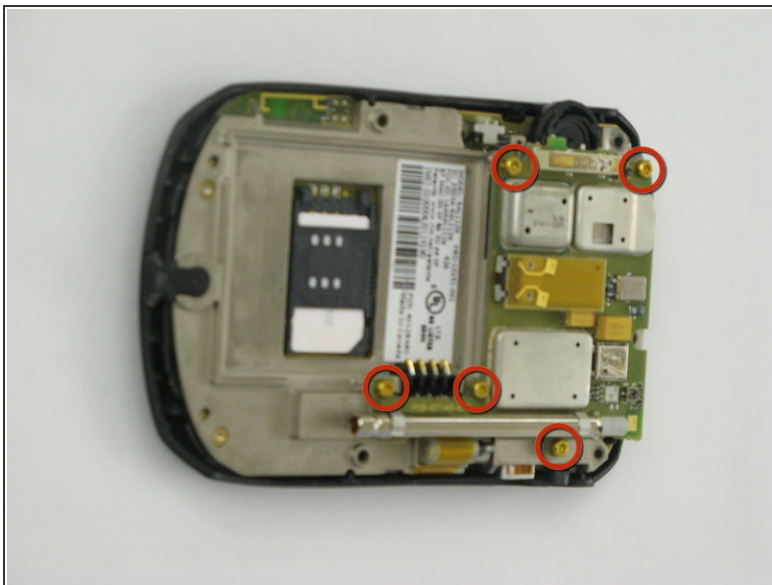



- Remove the indicated screws using a T6 Torx screwdriver.

Step 8



- Remove the logic board
- Remove the indicated screw using the T6 Torx screwdriver

Step 9

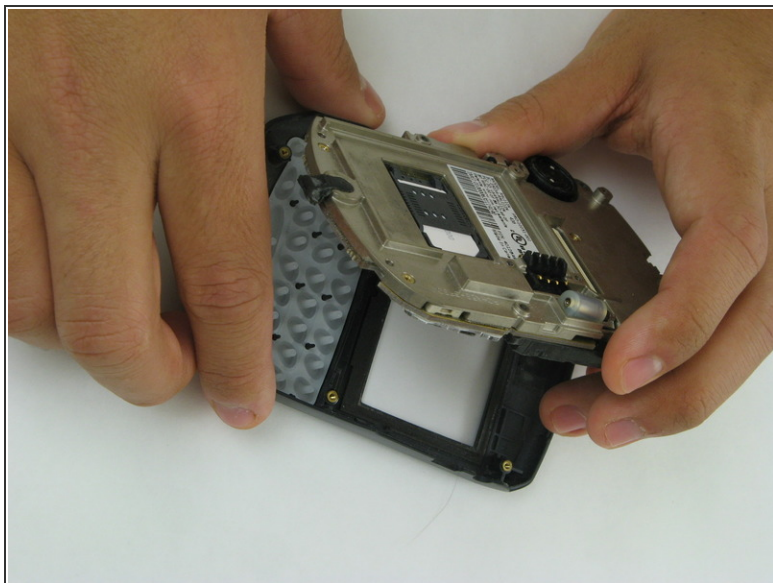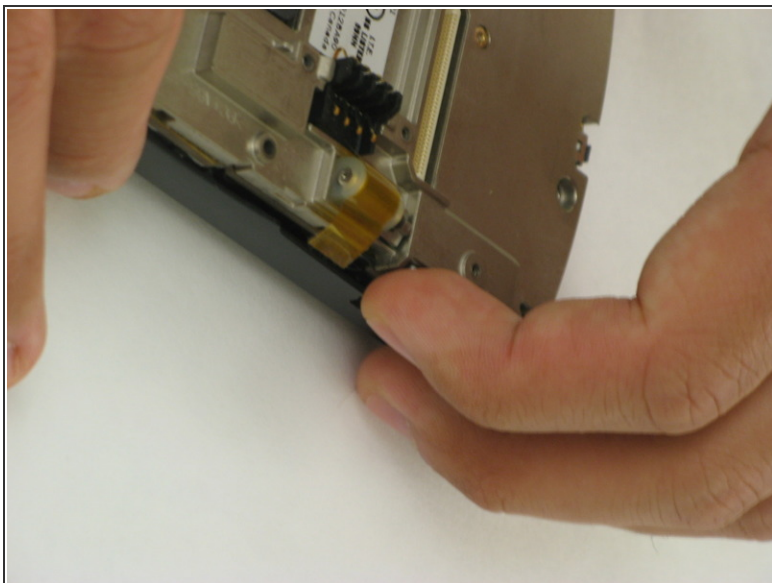

- Pull the metal plate away from the front panel of the cell phone

Step 10




- Place the faceplate face-down and the interior of the phone face-up, as shown.

Step 11 — LCD Screen





- Turn the phone so that it faces towards you.

Step 12

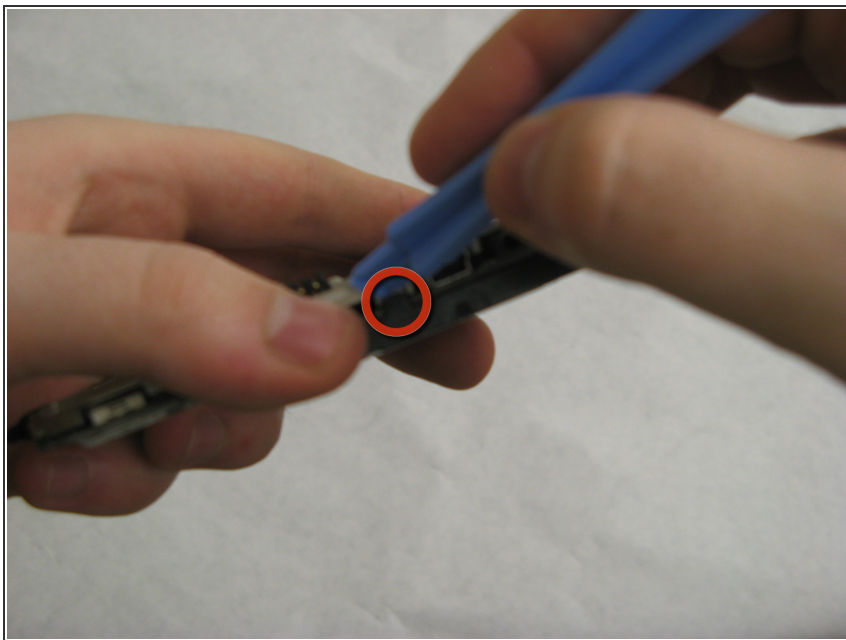

- Use a pick or other small tool to pop the small plastic clip holding the LCD panel on

Step 13

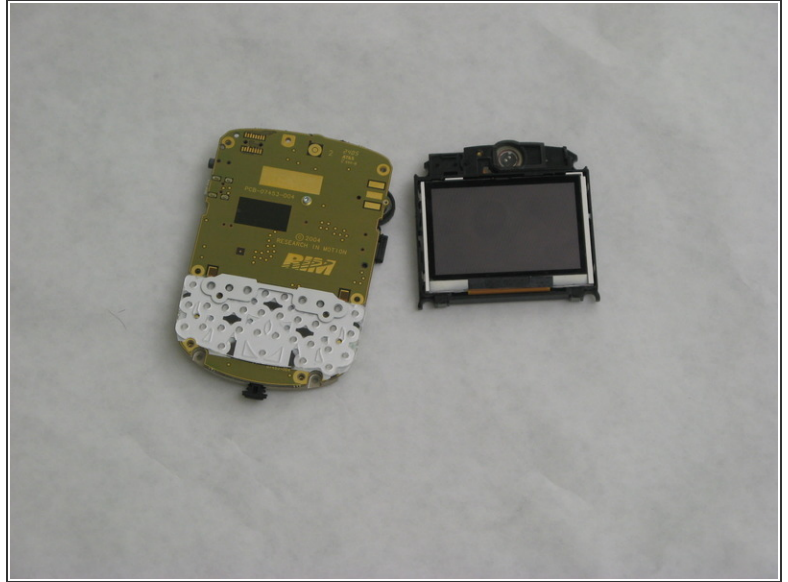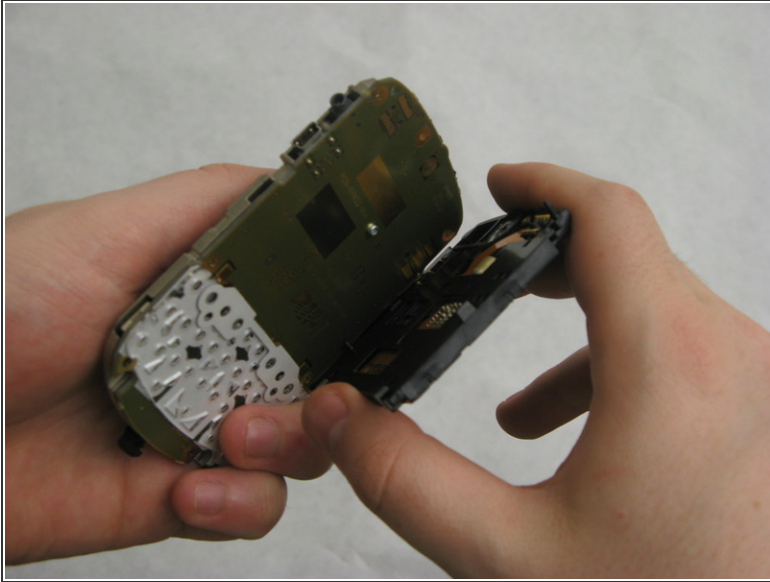

- Pull the LCD screen off of the board.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-02 06:08:27 AM.